




50Hz

Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL submersible handy pumps serve a wide range of pumping applications on utility, construction, industrial, and municipal job sites.

Handy and Residue Pump **SAVVY 300/600**

Handy Pump



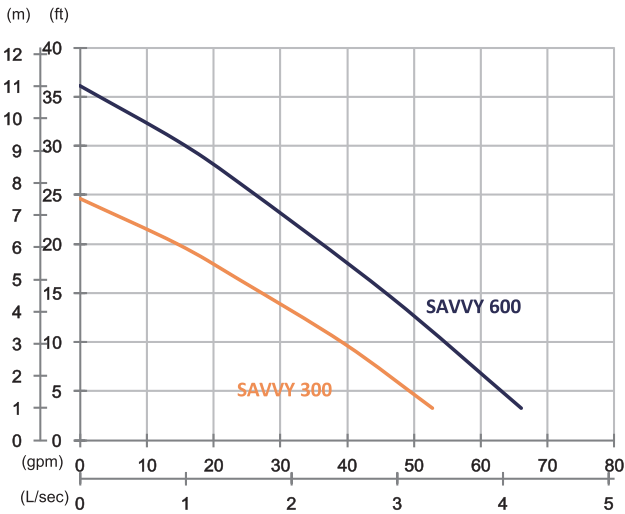

	SAVVY 300	SAVVY 600
OUTPUT	0.25 kW (0.33 HP)	0.55 kW (0.75 HP)
OUTLET	2" (50 mm)	2" (50 mm)
SOLID PASSAGE	6 mm	6 mm
Weight	4 kg	6 kg
HEAD	Rated: 5 m Max: 7.5 m	Rated: 8 m Max: 11 m
FLOW	Rated: 1.5 L/s Max: 3.3 L/s	Rated: 1.5 L/s Max: 4.2 L/s

Pump Type		Electric Submersible Pumps
Motor	Phase	1-Phase
	Type	Induction Motor
	Poles	2 Pole (2850 rpm)
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Specs.	Impeller Type	Vortex
	Shaft Seal	Single Mechanical Seal Ceramic/Carbon
	Bearings	C3 Shielded ball bearings
	Cable	H05RN-F (SAVVY 300) H07RN-F (SAVVY 600) 10 m or longer upon request
Materials	Pump Casing	Synthetic Polymers
	Impeller	Synthetic Polymers
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Strainer	Synthetic Polymers
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		10 m (33 ft)
pH Range		pH 5 - pH 8

